

4

DTIC FILE COPY

CHEMICAL
RESEARCH,
DEVELOPMENT &
ENGINEERING
CENTER

CRDEC-TR-206

DETERMINATION OF 2-CHLOROVINYLARSONIC ACID
IN ENVIRONMENTAL WATERS
BY ION CHROMATOGRAPHY

Paul C. Bossle
Stephen G. Pleva
John J. Martin

RESEARCH DIRECTORATE

September 1990

DTIC
ELECTE
AUG 30 1990
S B D



U.S. ARMY
ARMAMENT
MUNITIONS
CHEMICAL COMMAND

Aberdeen Proving Ground, Maryland 21010-5423

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution unlimited

90 01 21 015

AD-A226 769

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorizing documents.

Distribution Statement

Approved for public release; distribution is unlimited.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 1990 September	3. REPORT TYPE AND DATES COVERED Final, 89 Jul - 89 Nov
4. TITLE AND SUBTITLE Determination of 2-Chlorovinylarsonic Acid in Environmental Waters by Ion Chromatography			5. FUNDING NUMBERS PR-1C162622A553A
6. AUTHOR(S) Bossle, Paul C., Ph.D.; Pleva, Stephen G.; and Martin, John J.			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) CDR, CRDEC, ATTN: SMCCR-RSL, APG, MD 21010-5423			8. PERFORMING ORGANIZATION REPORT NUMBER CRDEC-TR-206
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE
13. ABSTRACT (Maximum 200 words) Lewisite, through its hydrolysate 2-chlorovinylarsonous acid, is thought to oxidize gradually in seawater, freshwater, and soil to form 2-chlorovinylarsonic acid (CVAOA). Like lewisite, CVAOA is also a potential vesicant. The high-performance liquid chromatography method is described here to directly detect and analyze CVAOA in seawater and surface water. Separating CVAOA from the aqueous matrix is carried out using both conventional (ion exchange) and ion-pair reverse phase ion chromatography. Using eluent suppression conductivity and ultraviolet as dual modes of detection, the detection limit is 10 ng.			
14. SUBJECT TERMS Lewisite analysis Chlorovinylarsonic acid Chlorovinylarsonous acid			15. NUMBER OF PAGES 15
Liquid chromatography Seawater analysis Environmental water analysis, 55			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL

Blank

PREFACE

The work described in this report was authorized under Project No. 1C162622A553A, CB Threat Agent Chemistry and Effects. This work was started in July 1989 and completed in November 1989. The experimental data are recorded in laboratory notebook 89-0038.

The use of trade names or manufacturers' names in this report does not constitute an official endorsement of any commercial products. This report may not be cited for purposes of advertisement.

Reproduction of this document in whole or in part is prohibited except with permission of the Commander, U.S. Army Chemical Research, Development and Engineering Center (CRDEC), ATTN: SMCCR-SPS-T, Aberdeen Proving Ground, Maryland 21010-5423. However, the Defense Technical Information Center and the National Technical Information Service are authorized to reproduce the document for U.S. Government purposes.

This report has been approved for release to the public.

Acknowledgments

The authors acknowledge Dr. William T. Beaudry, Michael W. Ellzy, Irwin Master, Ronald J. Piffath, and Linda J. Szafraniec, Research Directorate, CRDEC, for their technical contributions, and Stella C. Matthews for her preparation of the draft manuscript for processing.



Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Blank

CONTENTS

	Page
1. INTRODUCTION	7
2. MATERIALS AND METHODS	8
2.1 Chemicals	8
2.2 Instrumentation	8
2.3 Chromatographic Procedure	8
2.4 Sample Preparation	9
3. RESULTS AND DISCUSSION	9
4. CONCLUSION	14
LITERATURE CITED	15


LIST OF FIGURES

1	IE-Conductivity Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater	10
2	IE-UV Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater	11
3	IPRP-Conductivity Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater	12
4	IPRP-UV Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater	13

DETERMINATION OF 2-CHLOROVINYLARSONIC ACID IN ENVIRONMENTAL WATERS BY ION CHROMATOGRAPHY

1. INTRODUCTION

Through its hydrolysate 2-chlorovinylarsonous acid (CVAA), lewisite is thought to oxidize gradually in seawater, freshwater, and soil to form the stable and highly water soluble 2-chlorovinylarsonic acid (CVAOA).¹



Because CVAOA is also a potent blistering agent,² any detection protocol for lewisite should also apply to CVAOA.

The only method currently available for analyzing CVAOA in trace amounts in the environment involves measuring nonspecific arsenic using the atomic absorption spectroscopy technique. Although it is sensitive at the parts per billion (ppb) level, this method cannot differentiate an artificially imposed source of arsenic from real-world background levels.

Recently, this laboratory developed a methodology for analyzing CVAA in environmental waters by high-performance liquid chromatography (HPLC).^{3,4} The CVAA peak was identified by the oxidative derivatization (H₂O₂) of CVAA to CVAOA, followed by conventional ion-pair reverse phase (IPRP) liquid chromatography.³ Using this same liquid chromatographic technique, the presence of CVAOA was also detected in aged (>1 yr) laboratory standards of CVAA in deionized water.*

To determine the extent to which lewisite actually converts to CVAOA in the environment, the analytical methodology must be first available for detecting, separating, and quantitating CVAOA in environmental waters. This report describes the development of a new method for directly separating CVAOA from aqueous matrices by both conventional ion exchange (IE) and IPRP ion chromatography using eluent suppression conductivity and ultraviolet (UV) absorption as dual detection modes. The feasibility of this method for detecting and analyzing CVAOA in surface water and seawater is demonstrated.

*Bossle, P.C., Pleva, S.G., and Martin, J.J., U.S. Army Chemical Research, Development and Engineering Center, Aberdeen Proving Ground, MD, January 1990, unpublished data.,

2. MATERIALS AND METHODS

2.1 Chemicals.

Water used for standards in this study was distilled and deionized (10-14 meg/cm) using the Barnstead Nanopure II system (Barnstead/Sybron, Boston, MA). Acetonitrile, which was used as the organic modifier, was HPLC grade (Burdick and Jackson, Muskegon, MI). The ion-pair reagent, HPLC grade tetrapropylammonium hydroxide (TPAOH) (0.10 molar in water), was obtained from Dionex Corporation (Sunnyvale, CA). Analytical grade sodium bicarbonate and sodium carbonate were obtained from Mallinckrodt Chemical Works (St. Louis, MO). Simulated ocean water was prepared from "Instant Ocean" (Aquarium Systems, Incorporated, Mentor, OH) according to directions provided by the supplier. The CVAOA was synthesized using the procedures of Lewis and Stiegler⁵ and gave analytical data consistent with its chemical structure.

2.2 Instrumentation.

Chromatography was performed using a Model 2120i Ion Chromatograph (Dionex Corporation) equipped with both a variable wavelength UV and a 5- μ L flow-through conductivity detector in series. Samples were introduced by an air-activated valve injector with a 50- μ L sample loop. This system was connected to a Model 4270 Recorder-Integrator (Dionex Corporation) that measured UV and conductivity detector response in terms of peak area. The UV spectrum of CVAOA was obtained in deionized water using a Varian 2300 Spectrophotometer (Varian Corporation, Sunnyvale, CA).

2.3 Chromatographic Procedure.

Ion exchange separations were performed under the following conditions: column, Dionex HPIC-AS4A; eluent, 0.75 mM sodium bicarbonate/2.2 mM sodium carbonate (Dionex type AFS fiber suppressor); and flow rate, 2 mL/min.

Ion-pairing reverse phase separations were performed under the following conditions: column, Dionex MPIC-NS1; column temperature, ambient; eluent, 2 mM TPAOH, 1 mM sodium carbonate, 1.2% acetonitrile (Dionex type AFS-2 fiber suppressor); and flow rate, 1 mL/min.

The UV detection of CVAOA was carried out at a 215-nm wavelength (0.01-0.05 AUFS). Conductivity detection was determined at a sensitivity of 0.3-3.0 μ SFS.

A stock solution of CVAOA at a concentration of 1,000 μ L/mL was prepared by adding 100 mg of CVAOA to a 100-mL volumetric flask and slowly dissolving the compound with shaking to volume with deionized distilled water. The stock solution of CVAOA was injected onto the column(s), and retention times of 9.26 min (IE) and 11.26 min (IPRP) were determined. The CVAOA peak fractions of the eluent were collected, evaporated down using a nitrogen stream at ambient temperature, and identified by mass spectrometry (MS). Calibration curves were obtained by injecting a known concentration (200, 400, 1,000, 4,000, and 10,000 ng/mL) of CVAOA in deionized water onto both an IE and an IPRP column in triplicate and measuring both the UV and conductivity detector responses obtained.

2.4 Sample Preparation.

Both a surface water and a simulated seawater sample were spiked with CVAOA at two concentration levels. For UV detection, the samples were spiked at 1,000 ng/mL. For conductivity detection, being both less selective and sensitive, the samples were spiked with CVAOA at 4,000 ng/mL. The samples were filtered, along with the unspiked surface water and simulated seawater samples, and injected into the liquid chromatograph.

3. RESULTS AND DISCUSSION

In environmental analysis, multiple analytical techniques are often required to cross confirm analyte identity and avoid serious misinterpretation of data. By using both IE and IPRP separations, two entirely different physical parameters of CVAO [i.e., acid dissociation (pK_a) and molecular lipophilicity, respectively] are employed as separation modes. The CVAOA, a strong divalent acid,⁶ is retained on an IE column while nonionic and cationic organic and inorganic species are swept through with the void. Analogously, the lipophilic character of the chlorovinyl moiety gives CVAOA in the IPRP separation mode a strong attraction to the polystyrene-divinyl benzene reverse-phase column and hence an increased retention time.

The use of both conductivity and UV detection makes possible the selective identification of CVAOA both as an anionic and UV absorbing species. However, a suppressor column must be used to decrease the high background conductance and UV absorbance of the eluent before conductivity and UV detection can take place. The result allows UV detection of CVAOA at 215 nm ($E = 4.67$) with moderate selectivity and sensitivity. Unlike lewisite and CVA4,⁴ the UV spectrum of CVAOA shows no absorption shoulder in the 225-230-nm spectral range. The CVAOA responded linearly (correlation coefficient >0.99) to both conductivity and UV detection over a range of 10-500 ng of injected CVAOA. Ultraviolet detection, in comparison to conductance, was significantly more sensitive with detection limits being approximately 10 ng (UV) and 50 ng (conductivity), respectively, with a signal-to-noise ratio of 3.

The feasibility of this method to detect CVAOA in environmental waters was demonstrated with spiked surface water and simulated seawater samples using IE and IPRP separations with conductivity and UV detection. Figures 1-4 show the experimental results using the four possible separation-detection combinations.

In all cases (Figures 1-4), the CVAOA peak in the chromatograms of spiked surface waters is free of matrix effect.

However, the CVAOA peak in the spiked seawater chromatograms of Figures 1 and 3 is totally obliterated by matrix effects. This phenomenon results because conductivity detection is nonselective in that it measures all ionic species present in the eluent stream. Therefore, conductance cannot be used to detect CVAOA in seawater at the tested concentrations. In Figures 2 and 4, only UV absorbing species are selectively measured with the consequence that the CVAOA peak in the chromatograms is relatively free of matrix effects.

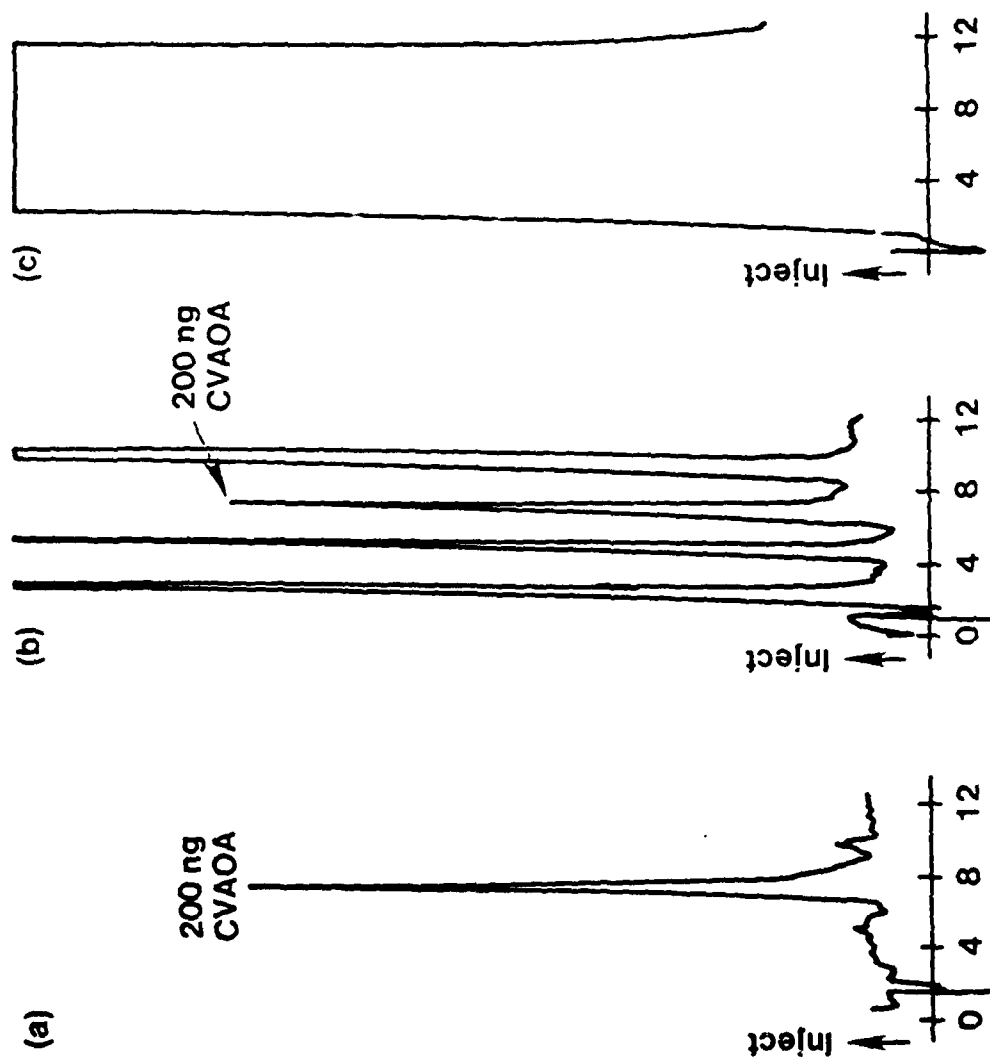


Figure 1. IE-Conductivity Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater

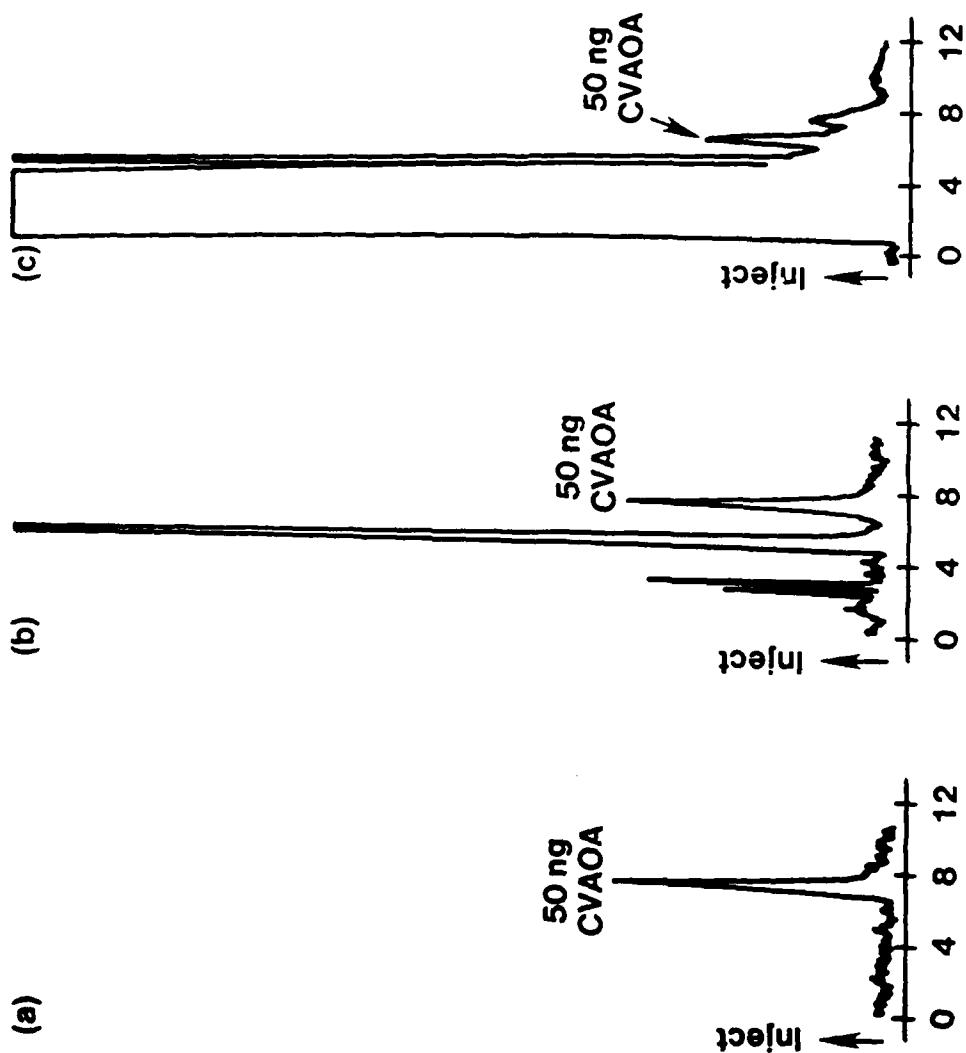


Figure 2. IE-UV Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater

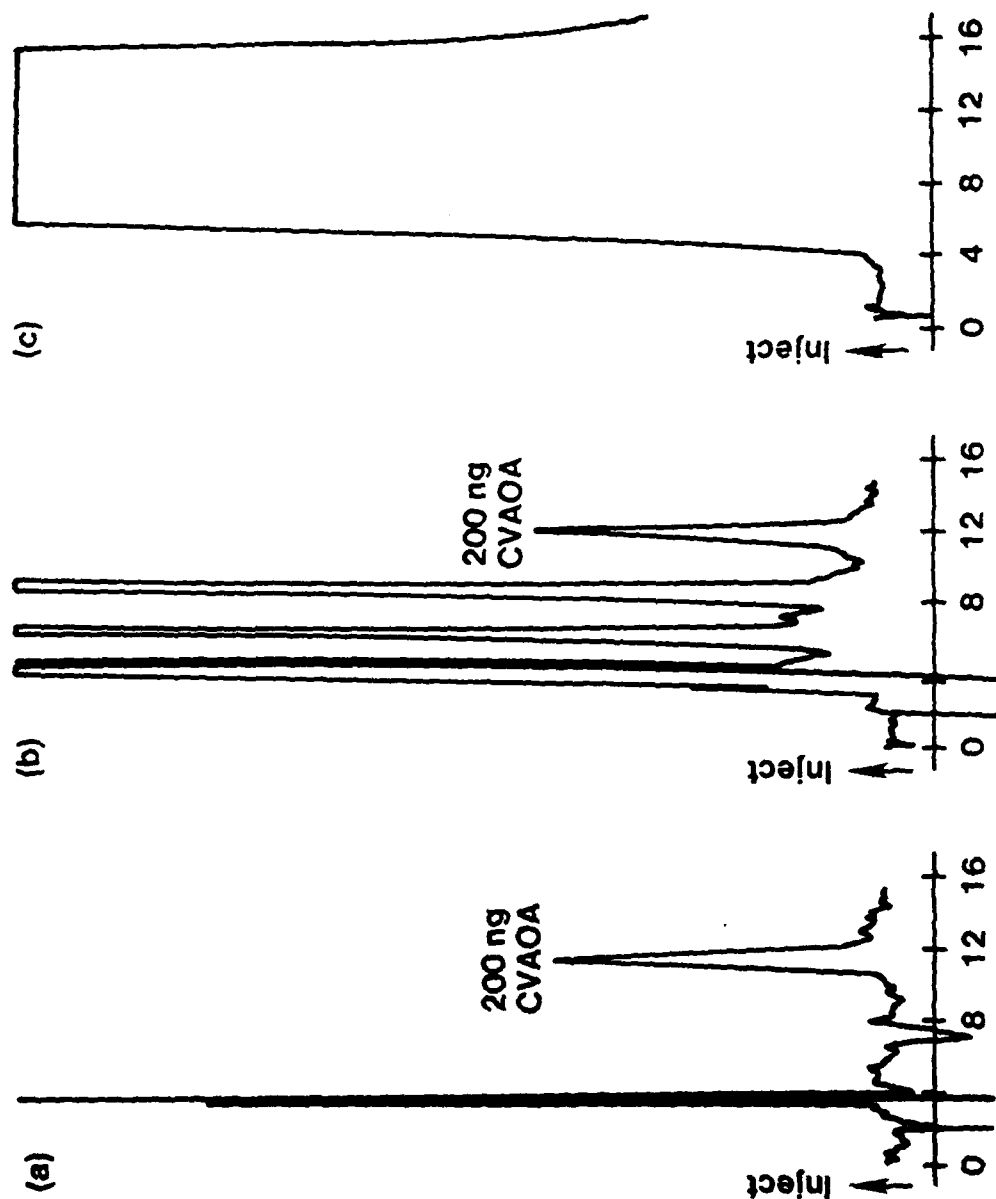


Figure 3. IPRP-Conductivity Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater

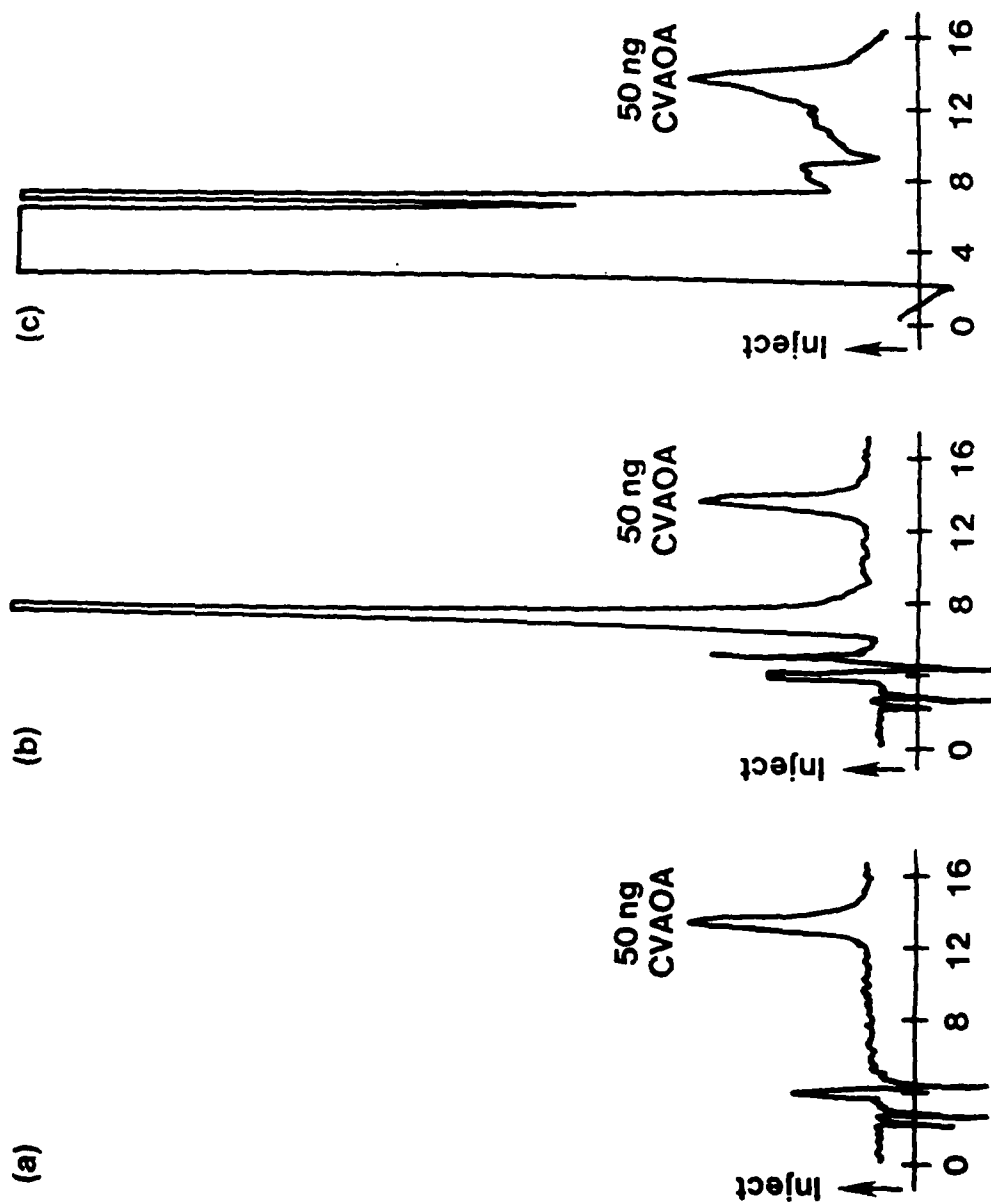


Figure 4. IPRP-UV Chromatograms for (a) CVAOA Standard, (b) Spiked Surface Water, and (c) Spiked Simulated Seawater

4. CONCLUSION

Ion exchange and IPRP ion chromatography with conductivity and UV detection is a rapid and direct method for analyzing 2-chlorovinylarsonic acid (CVAOA) in aqueous matrices in quantities as low as 10 ng. The feasibility of this method for detecting and analyzing CVAOA in surface water and seawater is demonstrated.

LITERATURE CITED

1. Rosenblatt, D.H., Miller, T.H., Dacre, J.C., Muul, I., and Cogley, D.R., Eds; Problem Definition Studies on Potential Environmental Pollutants. II. Physiological, Chemical, Toxicological, and Biological Properties of 16 Substances, TR 7509, U.S. Army Medical Bioengineering Research and Development Laboratory, Fort Detrick, MD, 1975, UNCLASSIFIED Report.
2. Cameron, G.R., Carleton, H.M., and Short, R.H.D., "Pathological Changes Induced by Lewisite and Allied Compounds," J. Path. Bact. Vol. 58, pp 411-422 (1946).
3. Bossle, P.C., Determination of Lewisite Contamination in Environmental Waters by High Performance Liquid Chromatography, Abstract of Papers, No. 62, 30th Rocky Mountain Conference, Denver, CO, 31 July-5 August 1988.
4. Bossle, P.C., Ellzy, M.W., and Martin, J.J., Determination of Lewisite Contamination in Environmental Waters by High-Performance Liquid Chromatography, CRDEC-TR-042, U.S. Army Chemical Research, Development and Engineering Center, Aberdeen Proving Ground, MD, January 1989, UNCLASSIFIED Report.
5. Lewis, W.L., and Stiegler, H.D., "The Beta-Chlorovinyl Arsines and Their Derivatives," J. Am. Chem. Soc. Vol. 47, pp 2546-2556 (1925).
6. Doak, G.O., and Freedman, L.D., Organometallic Compounds of Arsenic, Antimony, and Bismuth, pp 26-27, John Wiley and Sons, New York, NY, 1970.